

DESCRIPTION

CATALOG: E-724-J-242	BALLAST TYPE: Electronic	STARTING METHOD: Programmed Start	NUMBER OF LAMPS - LAMP TYPE: 1 or 2 - CFM26W/Gx24q, CFM32W/Gx24q, CFM42W/Gx24q
--------------------------------	------------------------------------	---	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 347 V ~ ±10%	LAMP WATTS: 26/32/42 w	INPUT WATTS: 93 w	INPUT CURRENT: 0.27 A	PF: > 0.97	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.97	BEF: 1.04	LAMP CONNECTION: SERIES	THD (1): < 10%
						NO PCB'S

(1) FOR 2-CFM42W/Gx24q

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS							
	UNITS	M1	M2	M3	W	L	H	
	INCHES	2.0	4.65	4.21	2.75	5.05	1.50	
	TOL (+/-)	0.01	0.01	0.01	0.05	0.05	0.05	
	MM	50.8	118.3	107.1	69.9	128.3	38.2	
	TOL (+/-)	0.25	0.25	0.25	1.30	1.30	1.30	
LEAD LENGTH								
UNITS	BLACK	WHITE	YELLOW	YELLOW	RED	RED	BLUE	BLUE
INCHES	10	10	11.61	11.61	11.61	11.61	11.61	11.61
TOL (+/-)	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
MM	255	255	295	295	295	295	295	295
TOL (+/-)	10	10	10	10	10	10	10	10

CARTON CHARACTERISTICS

UNITS/CARTON 20	CARTONS/LAYER 16+8	# OF LAYERS 9+1	UNITS/PALLET 1824	PIECE WEIGHT 1.21 lbs	CARTON WEIGHT 15.4 lbs	PALLET WEIGHT 2,418 lbs
CARTONS/PALLET 152	CARTON DIMENSIONS 9.5" x 10.5" x 4"		PALLET DIMENSIONS 40" x 48" x 7"		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 48"	

MISC.

--

CARTON LABEL

ISB SOLA BASIC

CAT. E-724-J-242

VOLTAGE 347 **0.270 A**

50/60 Hz **UNITS 12**

FOR 1 or 2 CF TRIPLE or QUAD TUBE LAMPS 26W or 32W or 42W-T4


PROGRAMMED START ELECTRONIC BALLAST

ISO 9001:2000 QM1

SR® LRI04469

MADE IN MEXICO 10 10

ELECTRICAL DIAGRAM

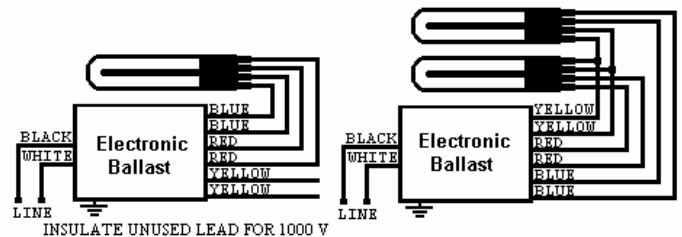

PRODUCT LABEL

SOLA

PROGRAMMED START ELECTRONIC BALLAST E-724-J-242 HIGH POWER FACTOR

347 V - 0.270 A [50/60] Hz

FOR 1 or 2 CF TRIPLE or QUAD TUBE LAMPS 26W or 32W or 42W-T4

TYPE 1 OUTDOOR CLASS P

With Lamp End-of-life Detection

SOUND RATED **A**

MINIMUM 0° C

5 YEAR WARRANTY

NO PCB'S

INHERENT THERMAL PROTECTION

SR®

MADE IN MEXICO

GROUND BALLAST CASE. INSTALL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES. CAUTION: HAZARDOUS VOLTAGE. DISCONNECT LINE VOLTAGE BEFORE INSTALLING OR REPLACING. INSULATE UNUSED LEAD FOR 1000 V. ONLY USE 4 PIN RAPID START SOCKETS.



ISO 9001:2000



SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.