


### CATALOG NUMBER: E-971-W-SO100 FOR ONE 100 WATT, S54 HIGH PRESSURE SODIUM LAMP


Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/- 10%
Line Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	1.20	0.69	0.60	0.50
Open Circuit	0.52	0.30	0.27	0.23
Starting	0.95	0.56	0.47	0.41
Input Watts (W)	134	134	134	134
Open Circuit Voltage (V)	115	115	115	115
Drop Out Voltage (V)	80	138	160	184
UL(1029) Bench Top Rise	E	D	C	D
Recommended Fuse (Amps)	3	2	2	2
HIGH POTENTIAL TEST (VOLTS)				
1 Minute	2000			
2 Seconds	2500			
Open Circuit Voltage Test (volts)	105-125			
Short-Circuit Current Test (Amps)				
Secondary Current	2.8 - 3.2			
Input Current (Amps)	0.84 - 0.92	0.48 - 0.53	0.42 - 0.46	0.36 - 0.40

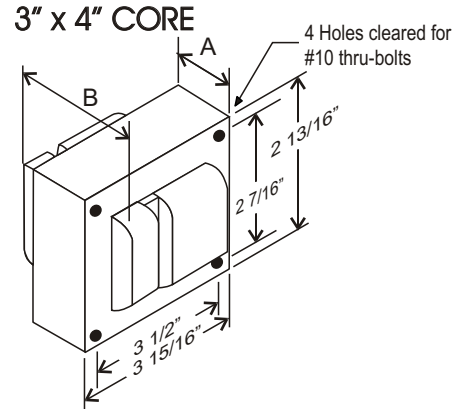


CORE AND COIL	
Dimension A (inches)	2.00
Dimension B (inches)	3.30
Weight (Lbs)	7.10
Lead Lengths (inches)	12

#### CAPACITOR


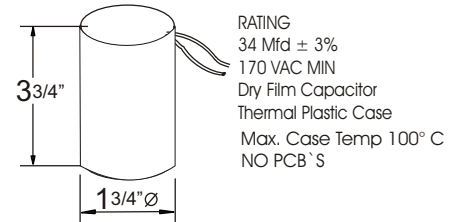


#### IGNITOR 37-63-AS-9.1-N7


Ballast to Lamp Distance (BTL): 2 feet

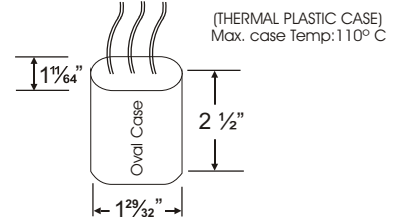

#### BRACKET CORE & COIL MOUNTING BRACKET

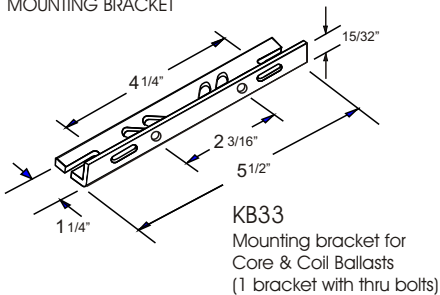


C-01  
MOUNTING CLIP for round case (Furnished as standard with B suffix ballast)



I-01  
MOUNTING CLIP for oval case (Furnished as standard with B suffix ballast)

#### WIRING DIAGRAM

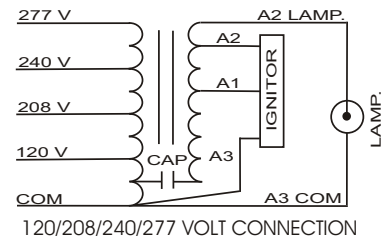

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



Made in Mexico by Industrias Sola Basic S.A de C.V.

## SOLA CANADA LIGHTING & POWER

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com