


CATALOG NUMBER: E-MCA00W171 FOR ONE 175 WATT, M137/M152 METAL HALIDE PULSE START LAMP


Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/-10%
Line Watts	+/- 10%
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-20° F or -30° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	1.80	1.10	0.90	0.80
Open Circuit	1.80	1.10	0.90	0.80
Starting	1.10	0.65	0.55	0.50
Input Watts (W)	208	208	208	208
Open Circuit Voltage (V)	275	275	275	275
Drop Out Voltage (V)	60	104	120	140
UL(1029) Bench Top Rise	D	D	D	D
Recommended Fuse (Amps)	5	3	3	2
HIGH POTENTIAL TEST (VOLTS)				
1Minute	2000			
2 Seconds	2500			
Open Circuit Voltage Test(volts)	250-300			
Short-Circuit Current Test (Amps)				
Secondary Current	1.65 - 2.00			
Input Current (Amps)	0.70 - 1.15	0.40 - 0.65	0.35 - 0.60	0.30 - 0.50

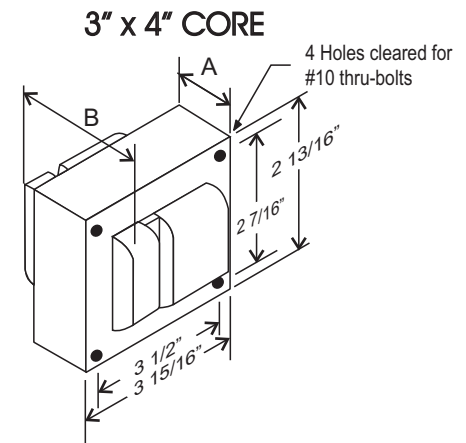


CORE AND COIL	
Dimension A (inches)	2.20
Dimension B (inches)	3.50
Weight (Lbs)	8.20
Lead Lengths (inches)	12

CAPACITOR

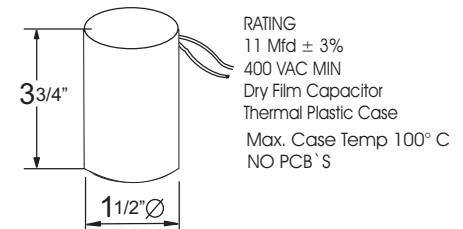


IGNITOR 37-63-AS-6.9-N7


Ballast to Lamp Distance (BTL): 2 feet
(THERMAL PLASTIC CASE)
Max. case Temp: 110° C




BRACKET CORE & COIL MOUNTING BRACKET

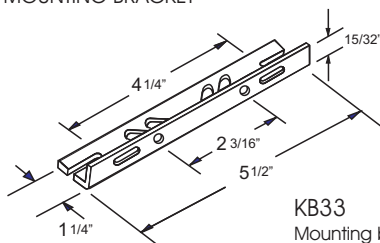

KB33
Mounting bracket for
Core & Coil Ballasts
(1 bracket with thru bolts)




C-01
MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)



I-01
MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)

WIRING DIAGRAM

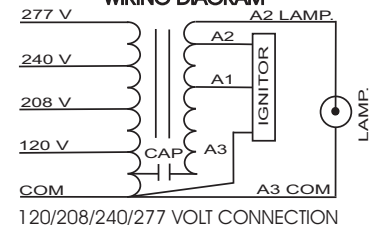

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



SOLA CANADA LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com