

### DESCRIPTION

<b>CATALOG:</b> E-725-J-254-R1-S	<b>BALLAST TYPE:</b> Electronic	<b>STARTING METHOD:</b> Programmed Rapid Start	<b>NUMBER OF LAMPS - LAMP TYPE:</b> 1 ó 2 F54T5, FC12T5 HO, FT36-39W/2G11, FT55W/2G11
-------------------------------------	------------------------------------	---	--

### ELECTRICAL CHARACTERISTICS

<b>INPUT VOLTAGE:</b> 347 V~ +/- 10%	<b>LAMP WATTS:</b> 54/55/36/55 W	<b>INPUT WATTS:</b> 110 W	<b>INPUT CURRENT:</b> 0.320 A	<b>OCV:</b> 900 V~ Min	<b>PF:</b> > 0,98	<b>FREQUENCY:</b> 50 / 60 Hz	<b>SOUND RATED:</b> A
<b>MIN START TEMP:</b> 32°F / 0°C	<b>CLASS:</b> P	<b>TYPE:</b> 1 outdoor	<b>BALLAST FACTOR:</b> 90%	<b>BEF:</b> 1,3	<b>LAMP CONNECTION:</b> Serie	<b>THD (1):</b> < 20 %	<b>NO PCB'S</b>

(1) FOR 2-F54T5

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	N/A	16,0625	16,375	1,1875	16,5	1,125
	TOL(+/-)		0,0125	0,0125	0,0125	0,0125	0,0125
	MM	N/A	407,9	415,9	30,2	419,1	28,6
	TOL(+/-)		0,31	0,31	0,31	0,31	0,31
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	BLUE		
INCHES	N/A	N/A	N/A	N/A	N/A		
TOL(+/-)							
MM	N/A	N/A	N/A	N/A	N/A		
TOL(+/-)							

### CARTON CHARACTERISTICS

<b>UNITS/CARTON</b> 10	<b>CARTONS/LAYER</b> 14	<b># OF LAYERS</b> 10	<b>UNITS/PALLET</b> 1400	<b>PIECE WEIGHT</b> 0,57 Kg.	<b>CARTON WEIGHT</b> 5,9 Kg.	<b>PALLET WEIGHT</b> 848 Kg.
<b>CARTONS/PALLET</b> 140	<b>CARTON DIMENSIONS</b> 44,5 x 17,3 x 7,5 cm.		<b>PALLET DIMENSIONS</b> 8,8 x 121,1 x 75,1 cm.		<b>PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET</b> 101,6 x 121,9 x 76,2 cm.	

### MISC.

#### CARTON LABEL

**ISB SOLA BASIC®**

**CAT. E-725-J-254-R1-S**

VOLTAGE 347      0.320 A

50/60 Hz      UNIT 10

FOR: 1 OR 2 LAMPS F54T5/HO  
1 OR 2 LAMPS FC12T5/HO  
1OR 2 LAMPS FT36W/2G11  
1OR 2 LAMPS FT55W/2G11


PROGRAMMED RAPID START  
ELECTRONIC BALLAST

ISO 9001:2000

MADE IN MEXICO

551-08348 E

#### ELECTRICAL DIAGRAM

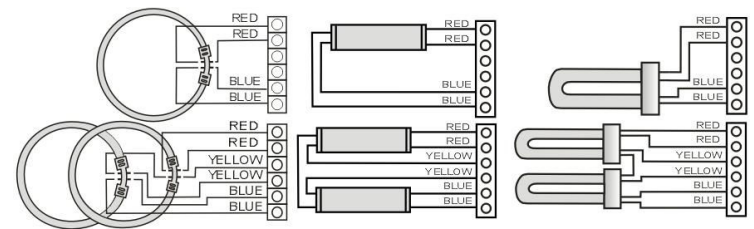

#### PRODUCT LABEL

**SOLA**

**E-725-J-254-R1-S**

PROGRAMMED RAPID START ELECTRONIC BALLAST

CLASS P

TYPE 1 OUTDOOR

USE ONLY WITHIN ELECTRICAL ENCLOSURE

USE 18 AWG SOLID COPPER WIRE 60V RATED ONLY. STRIPPED TO 0.33"



Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com