


CATALOG NUMBER: E-MZAFTJ39 FOR ONE 39 WATT, M130 METAL HALIDE LAMP

Line Voltage	120/277/347V
Regulation	
Line Volts	+/- 5%
Line Watts	+/-10%
Frequency	60 Hz
Circuit Type	HX-HPF
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-20° F or -30° C


Line Voltage (Volts)	120	277	347
Line Current (Amps)			
Operating	0.46	0.20	0.16
Open Circuit	1.02	0.45	0.35
Starting	0.38	0.16	0.13
Input Watts (W)	54	54	54
Open Circuit Voltage (V)	235	235	235
Drop Out Voltage (V)	90	208	260
UL(1029) Bench Top Rise	A	A	A
Recommended Fuse (Amps)	3	1	1
HIGH POTENTIAL TEST (VOLTS)			
1 Minute	2000		
2 Seconds	2500		
Open Circuit Voltage Test(volts)	205-265		
Short-Circuit Current Test (Amps)			
Secondary Current	0.60-0.70		
Input Current (Amps)	0.28 - 0.35	0.12 - 0.15	0.10 - 0.12

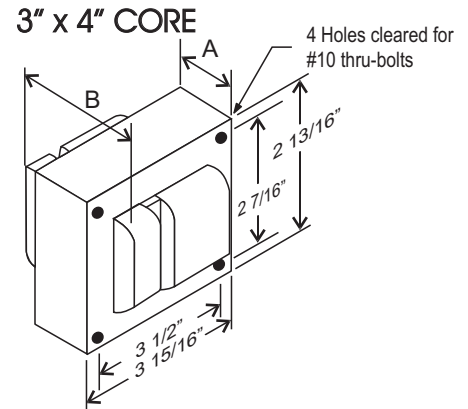

CORE AND COIL


Dimension A (inches)	1.00
Dimension B (inches)	2.30
Weight (Lbs)	4.15
Lead Lengths (inches)	12

CAPACITOR


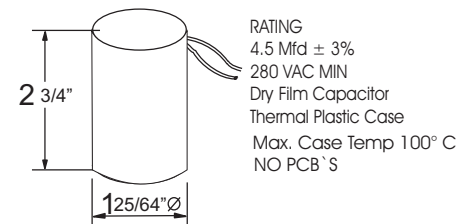


IGNITOR 356-AS-39-MH


Ballast to Lamp Distance (BTL): 5 feet

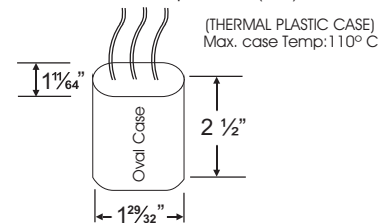

BRACKET CORE & COIL MOUNTING BRACKET

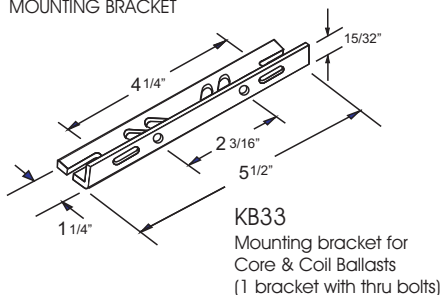


C-01
MOUNTING CLIP for round case (Furnished as standard with B suffix ballast)



I-01
MOUNTING CLIP for oval case (Furnished as standard with B suffix ballast)

WIRING DIAGRAM

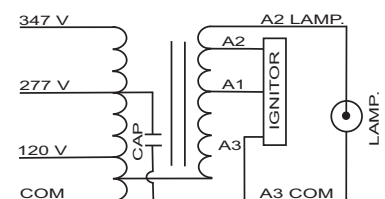

120/277/347 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

ISO 9001:2000



SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com