

DESCRIPTION

CATALOG: E620-J-240-TP-LST		STARTING METHOD: Rapid Start		INPUT VOLTAGE: 347 V~		OCV: 355 V~		FREQUENCY: 60 Hz				
BALLAST TYPE: Magnetic Ballast			CLASS: P		TYPE: 1 outdoor		LAMP CONNECTION: Series		SOUND RATED: A		NO PCB'S	

ELECTRICAL CHARACTERISTICS

LAMP TYPE	NUMBER OF LAMPS	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F40T12	2	40	-0/-18	75	0.22	0.78	1.040	0.99	9	1.6
F40T12/ES	2	34	60/16	65	0.19	0.73	1.123	0.99	11	1.8
F40T12/U	2	40	-0/-18	76	0.22	0.78	1.026	0.99	9	1.6
F40T12/U/ES	2	34	60/16	66	0.19	0.74	1.121	0.99	11	1.8
F40T10	2	40	-0/-18	77	0.22	0.76	0.987	0.98	11	1.6
F30T12	2	30	-0/-18	65	0.19	0.78	1.200	0.99	10	1.8
F30T12/ES	2	25	60/16	58	0.17	0.77	1.327	0.97	17	1.9
FC12T9 & FC16T9	2	32/40	-0/-18	70	0.20	0.74	1.057	0.99	10	1.7

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.687	8.906	8.344	2.375	9.5	1.5
	TOL(+/-)	0.010	0.010	0.010	0.050	0.050	0.050
MM	43	226	212	60	241	38	
TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	22	22	26	26	36		
TOL(+/-)	3/8	3/8	3/8	3/8	3/8		
MM	559	559	600	600	914		
TOL(+/-)	10	10	10	10	10		

CARTON CHARACTERISTICS

UNITS/CARTON	CARTON/LAYER	# OF LAYERS	UNITS PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
10	12	5	600	3.5 lbs	36 lbs	2 195 lbs
CARTON PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
60	12" x 12" x 4"	40" x 48" x 7"	40" x 48" x 27"			

MISC.

--


CARTON LABEL



PRODUCT LABEL



ELECTRICAL DIAGRAM

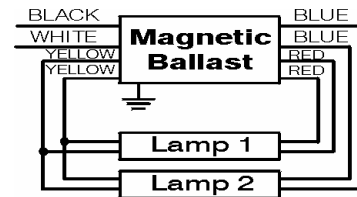

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.



Certificate No. 006261

SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com