


CATALOG NUMBER: E-871-FTJ-117-OD1 FOR ONE 175 WATT, M57 METAL HALIDE LAMP

Line Voltage	120/277/347V
Regulation	
Line Volts	+/-10%
Lamp Watts	+/-10%
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-20° F or -30° C

Line Voltage (Volts)	120	277	347
Line Current (Amps)			
Operating	1.80	0.78	0.62
Open Circuit	1.70	0.75	0.60
Starting	1.30	0.55	0.43
Input Watts (W)	210	210	210
Open Circuit Voltage (V)	305	305	305
Drop Out Voltage (V)	60	140	175
UL(1029) Bench Top Rise			
Recommended Fuse (Amps)	5	2	2

HIGH POTENTIAL TEST (VOLTS)

1 Minute	2000
2 Seconds	2500
Open Circuit Voltage Test(volts)	275-335
Short-Circuit Current Test (Amps)	
Secondary Current	1.5 - 1.9
Input Current (Amps)	0.70 - 0.29 - 0.23 - 1.10 0.50 0.40

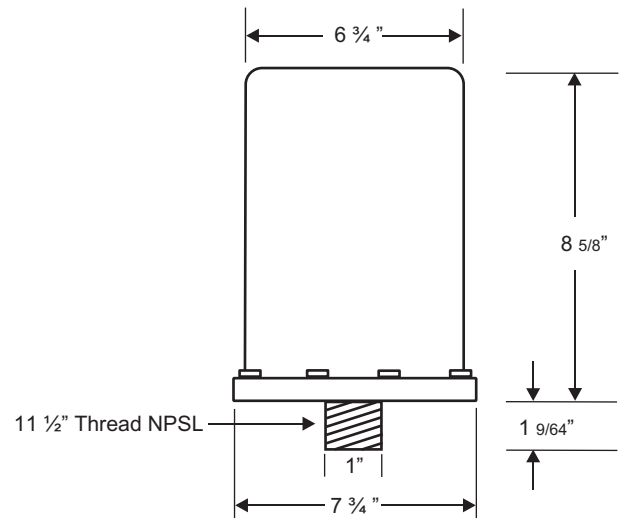


OUTDOOR WEATHERPROOF

Weight (Lbs)	19.6
Lead Lengths (inches)	12

Capacitor:

The capacitor is included as part of the potted assembly

WIRING DIAGRAM

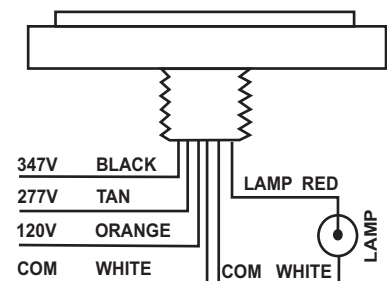

120/277/347 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

ISO 9001:2000



SOLA CANADA

LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com

Made in Mexico by Industrias Sola Basic S.A de C.V.