


Technical Data Sheet for HID Indoor Enclosed Ballasts



SOLA Canada
Indoor Enclosed Ballast Dimensional Data
Model #: EMIAFRM400-ID2
M59/H33 400W CWI 120/208/240V Indoor Enclosed Ballast

Line Voltage (Volts)	120	208	240
Line Current (Amps)			
Operating	4.10	2.37	2.05
Open Circuit	3.90	2.28	1.97
Starting	1.25	0.71	0.61
Input Watts (W)	462	462	462
Open Circuit Voltage (V)	300	300	300
Drop Out Voltage (V)	60	105	125
UL(1029) Bench Top Rise	D	D	D
Recommended Fuse (Amps)	10	7	5
HIGH POTENTIAL TEST (VOLTS)			
1 Minute	2000		
2 Seconds	2500		
Open Circuit Voltage Test (volts)	270-330		
Short-Circuit Current Test (Amps)			
Secondary Current	3.4-4.2		
Input Current (Amps)	0.53 -	0.31 -	0.27 -
	0.98	0.57	0.49

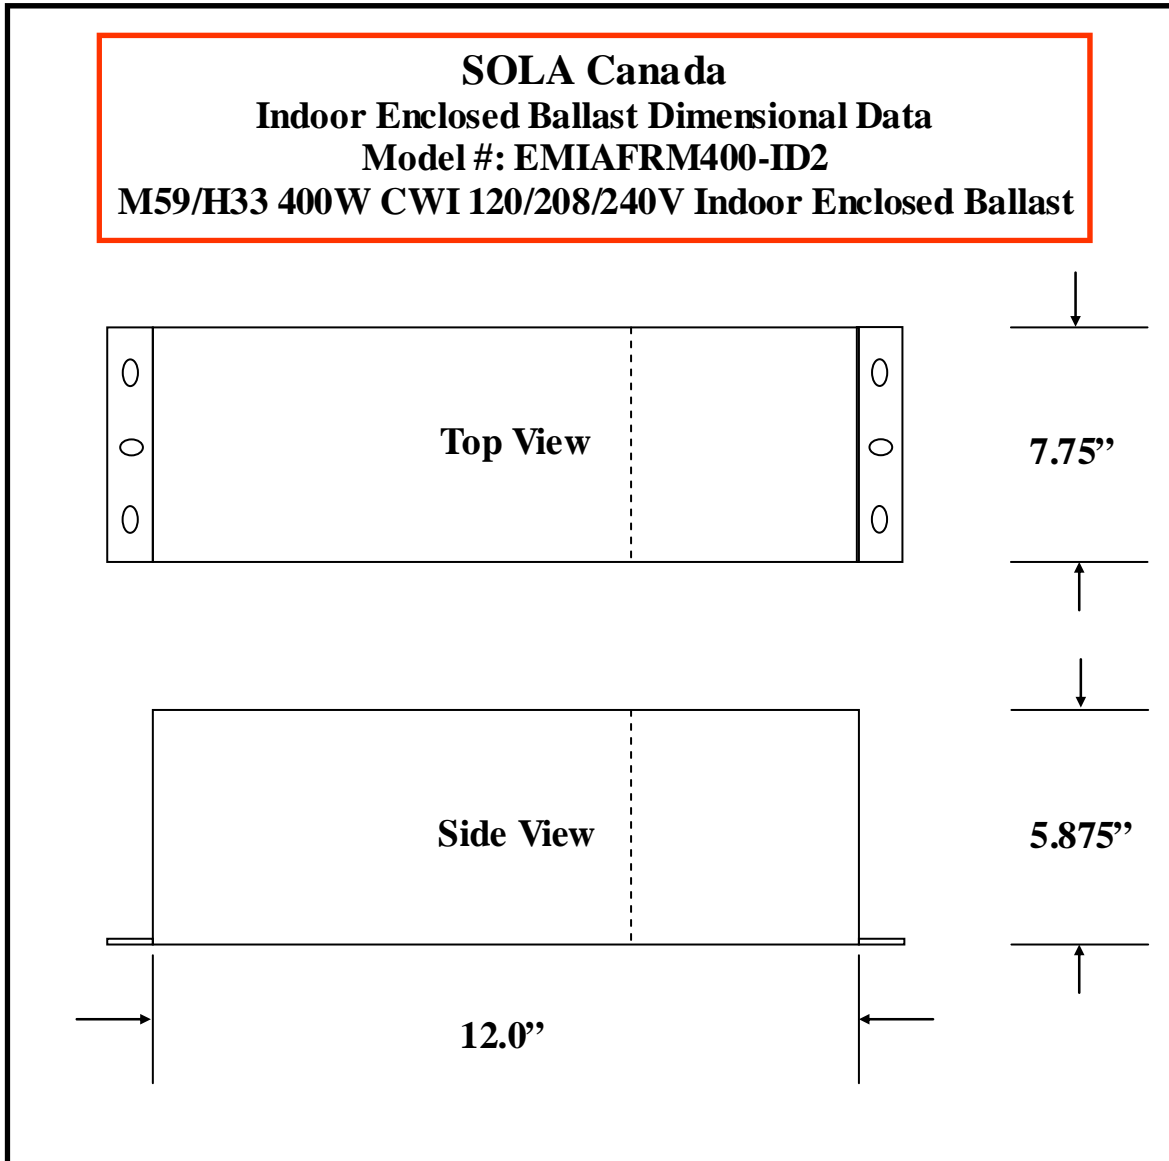

Wiring Diagram

