



Technical Data Sheet for HID Indoor Enclosed Ballasts

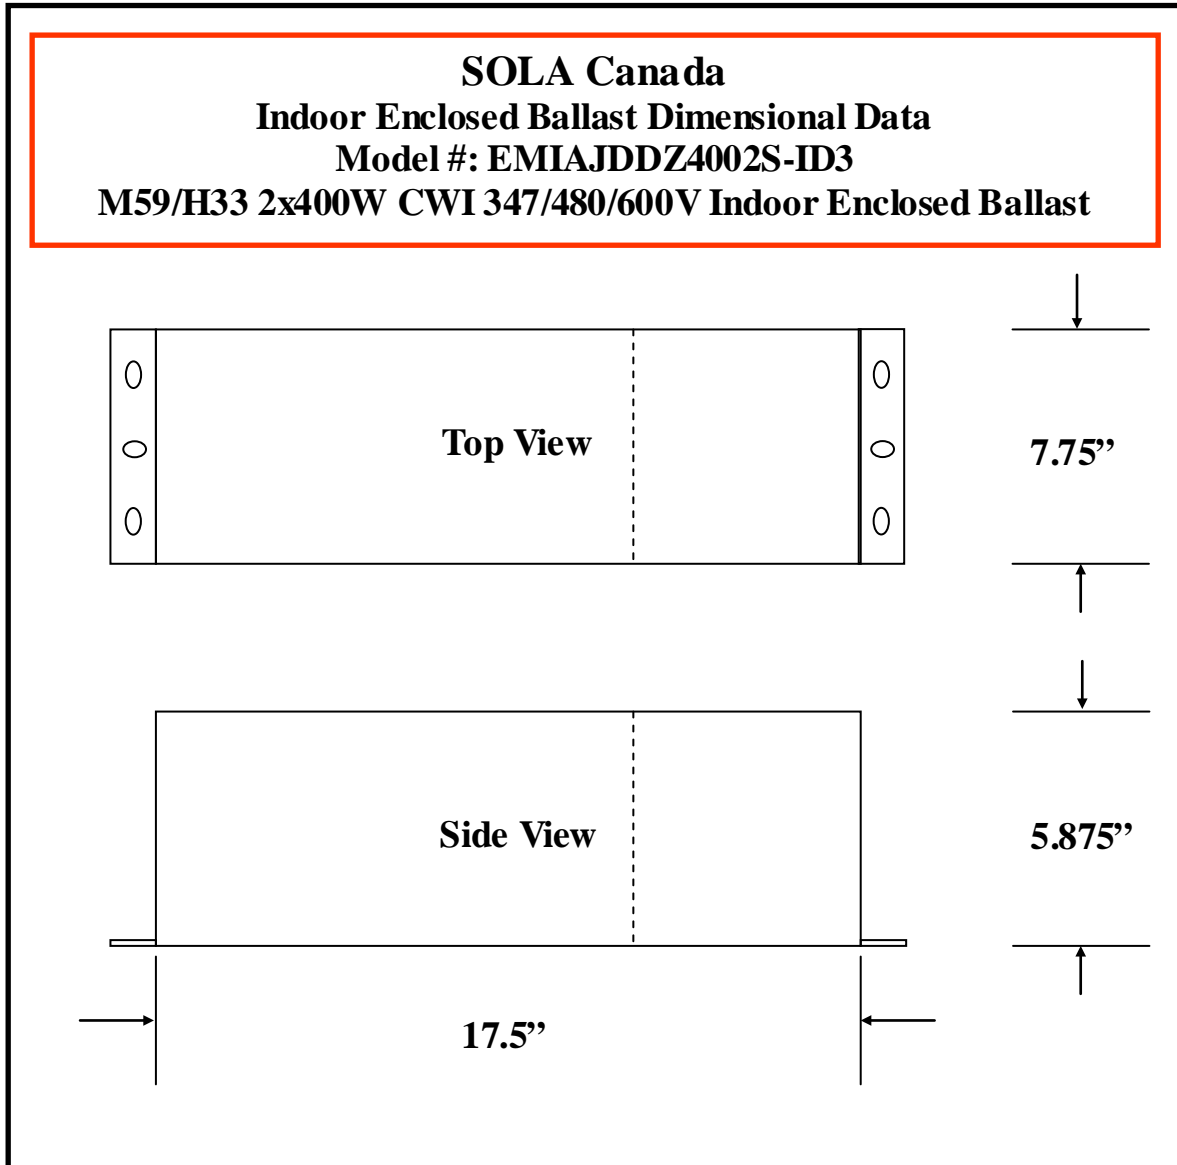

Wiring Diagram

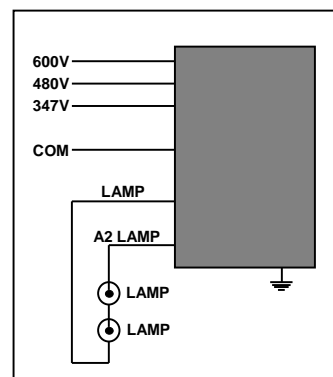

SOLA Canada
Indoor Enclosed Ballast Dimensional Data
Model #: EMIAJDDZ4002S-ID3
M59/H33 2x400W CWI 347/480/600V Indoor Enclosed Ballast

Line Voltage (Volts)	347	480	600
Line Current (Amps)			
Operating	2.60	1.90	1.50
Open Circuit	2.04	1.55	1.19
Starting	1.51	1.10	0.89
Input Watts (W)	890	890	890
Open Circuit Voltage (V)	600	600	600
Drop Out Voltage (V)	180	250	310
UL(1029) Bench Top Rise	D	D	C
Recommended Fuse (Amps)	8	5	4
HIGH POTENTIAL TEST (VOLTS)			
1Minute	2200		
2 Seconds	2700		
Open Circuit Voltage Test(volts)	545-635		
Short-Circuit Current Test (Amps)			
Secondary Current	3.5 - 4.0		
Input Current (Amps)	1.24 - 1.60	0.89 - 1.16	0.72 - 0.93

