


## CATALOG NUMBER: E-MZA0FT100F FOR ONE 100 WATT, M90 METAL HALIDE LAMP

Line Voltage	120/277V
Regulation	
Line Volts	+/- 5%
Line Watts	+/-10%
Frequency	60 Hz
Circuit Type	HX-HPF
Power Factor (min)	90%
Insulation Class	A(105°)
Min. Ambient Starting Temp.	-20° F or -30° C

Line Voltage (Volts)	120	277
Line Current (Amps)		
Operating	1.10	0.48
Open Circuit	2.50	1.07
Starting	0.79	0.33
Input Watts (W)	125	125
Open Circuit Voltage (V)	260	260
Drop Out Voltage (V)	84	194
UL(1029) Bench Top Rise	A	A
Recommended Fuse (Amps)	8	4
HIGH POTENTIAL TEST (VOLTS)		
1 Minute	2000	
2 Seconds	2500	
Open Circuit Voltage Test(volts)	230-290	
Short-Circuit Current Test (Amps)		
Secondary Current	1.10 - 1.32	
Input Current (Amps)	0.60 - 0.90	0.26 - 0.36


### IGNITOR: IN CAN

The ignitor is included as part of the potted assembly.  
Ballast to Lamp distance (BTL)= 50 feet.  
Temp. Rating: 90° C

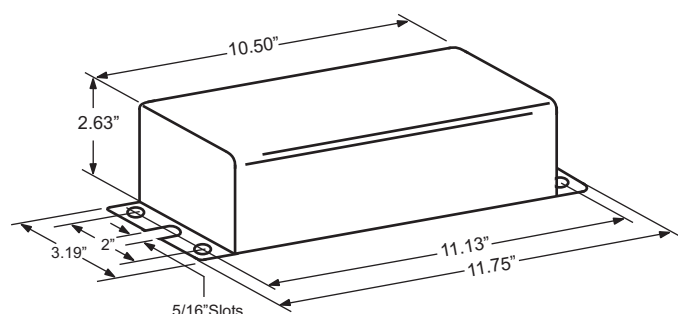

Weight (Lbs)	11.60
Lead lengths (Inches)	12.00
Sound rating	B

### WIRING DIAGRAM

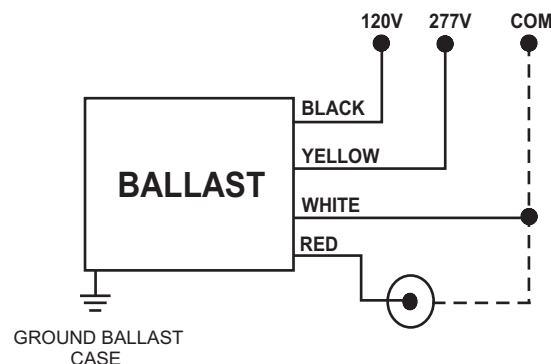

### 120/277 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



Made in Mexico by Industrias Sola Basic S.A de C.V.

**SOLA CANADA**  
**LIGHTING & POWER**

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com