

CATALOG NUMBER: E-SZA0FT100F FOR ONE 100 WATT, S54 HIGH PRESSURE SODIUM LAMP

Line Voltage	120/277V
Regulation	
Line Volts	+/- 5%
Line Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	HX-HPF
Power Factor (min)	90%
Insulation Class	A(105°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	277
Line Current (Amps)		
Operating	1.15	0.50
Open Circuit	1.95	0.65
Starting	1.10	0.35
Input Watts (W)	125	125
Open Circuit Voltage (V)	120	120
Drop Out Voltage (V)	95	220
UL(1029) Bench Top Rise	A	A
Recommended Fuse (Amps)	6	3

HIGH POTENTIAL TEST (VOLTS)


1 Minute	2000
2 Seconds	2500
Open Circuit Voltage Test(volts)	110-130

Short-Circuit Current Test (Amps)

Secondary Current	2.6 - 2.9
Input Current (Amps)	0.85 - 0.80 - 1.15 0.90


IGNITOR: IN CAN

The ignitor is included as part of the potted assembly.
Ballast to Lamp distance (BTL)= 30 feet.
Temp. Rating: 90° C

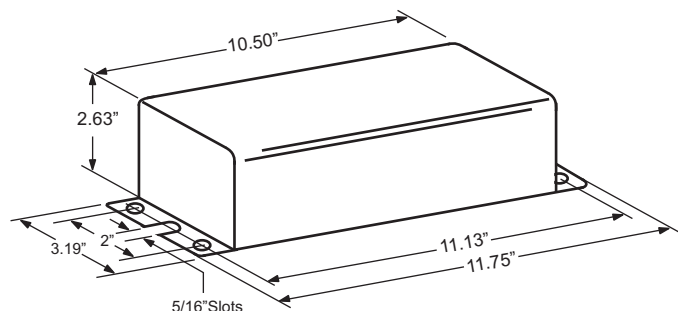

Weight (Lbs)	12.2
Lead lengths (Inches)	12.00
Sound rating	B

WIRING DIAGRAM

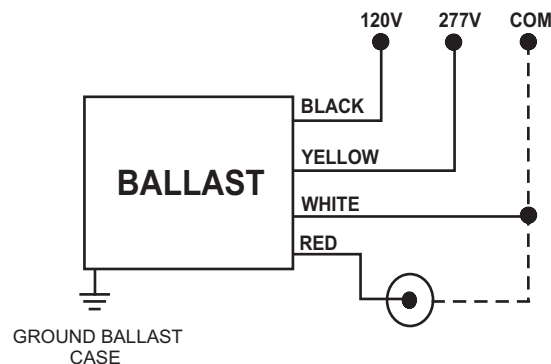

1 20/277 VOLT CONNECTION

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Certificate No. 006281



Made in Mexico by Industrias Sola Basic S.A de C.V.

SOLA CANADA
LIGHTING & POWER

171 Ambassador Drive
Units 8 & 9
Mississauga, ON
L5T 2J1

Phone: 905-670-0746
Fax: 905-670-9689

www.solacanada.com