

### DESCRIPTION

<b>CATALOG:</b> E-724-F-242	<b>BALLAST TYPE:</b> Electronic	<b>STARTING METHOD:</b> Programmed Start	<b>NUMBER OF LAMPS - LAMP TYPE:</b> 1 or 2 - CFM26W/Gx24q, CFM32W/Gx24q, CFM42W/Gx24q
--------------------------------	------------------------------------	---	--

### ELECTRICAL CHARACTERISTICS

<b>INPUT VOLTAGE:</b> 120 V ~ ±10%	<b>LAMP WATTS:</b> 26/32/42 w	<b>INPUT WATTS:</b> 93 w	<b>INPUT CURRENT:</b> 0.79 A	<b>PF:</b> > 0.97	<b>FREQUENCY:</b> 50/60 Hz	<b>SOUND RATED:</b> A
<b>MIN START TEMP:</b> 32°F / 0°C	<b>CLASS:</b> P	<b>TYPE:</b> 1 outdoor	<b>BALLAST FACTOR:</b> 0.97	<b>BEF:</b> 1.04	<b>LAMP CONNECTION:</b> PARALLEL	<b>THD (1):</b> < 10%
						<b>NO PCB'S</b>

(1) FOR 2-CFM42W/Gx24q

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS							
	UNITS	M1	M2	M3	W	L	H	
	INCHES	2.0	4.65	4.21	2.75	5.05	1.50	
	TOL (+/-)	0.01	0.01	0.01	0.05	0.05	0.05	
	MM	50.8	118.3	107.1	69.9	128.3	38.2	
TOL (+/-)	0.25	0.25	0.25	1.30	1.30	1.30		
LEAD LENGTH								
UNITS	BLACK	WHITE	YELLOW	YELLOW	RED	RED	BLUE	BLUE
INCHES	10	10	11.61	11.61	11.61	11.61	11.61	11.61
TOL (+/-)	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
MM	255	255	295	295	295	295	295	295
TOL (+/-)	10	10	10	10	10	10	10	10


### CARTON CHARACTERISTICS

<b>UNITS/CARTON</b> 20	<b>CARTONS/LAYER</b> 16+8	<b># OF LAYERS</b> 9+1	<b>UNITS/PALLET</b> 1824	<b>PIECE WEIGHT</b> 1.21 lbs	<b>CARTON WEIGHT</b> 15.4 lbs	<b>PALLET WEIGHT</b> 2,418 lbs
<b>CARTONS/PALLET</b> 152	<b>CARTON DIMENSIONS</b> 9.5" x 10.5" x 4"		<b>PALLET DIMENSIONS</b> 40" x 48" x 7"		<b>PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET</b> 40" x 48" x 48"	

### MISC.

#### CARTON LABEL

#### ELECTRICAL DIAGRAM

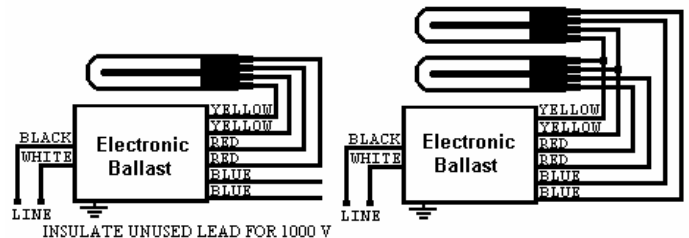

#### PRODUCT LABEL



ISO 9001:2000



## SOLA CANADA

### LIGHTING & POWER

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.