

### DESCRIPTION


<b>CATALOG:</b> E-725-U-239-R1-S	<b>BALLAST TYPE:</b> Electronic	<b>STARTING METHOD:</b> Programmed Rapid Start	<b>NUMBER OF LAMPS - LAMP TYPE:</b> 1 0 2 F39T5, 1 0 2 FC12T5
-------------------------------------	------------------------------------	---	--

### ELECTRICAL CHARACTERISTICS

<b>INPUT VOLTAGE:</b> 120 – 277 V~ +/- 10%	<b>LAMP WATTS:</b> 39, 40 W	<b>INPUT WATTS:</b> 40 to 82 W	<b>INPUT CURRENT:</b> 0,716 – 0,307 A	<b>OCV:</b> 900 V~ Min	<b>PF:</b> > 0,98	<b>FREQUENCY:</b> 50 / 60 Hz	<b>SOUND RATED:</b> A
<b>MIN START TEMP:</b> 32°F / 0°C	<b>CLASS:</b> P	<b>TYPE:</b> 1 outdoor	<b>BALLAST FACTOR:</b> 90%	<b>BEF:</b> 1,09	<b>LAMP CONNECTION:</b> Serie	<b>THD (1):</b> < 15 %	<b>NO PCB'S</b>

(1) FOR 2-F24T5

### PHYSICAL CHARACTERISTICS

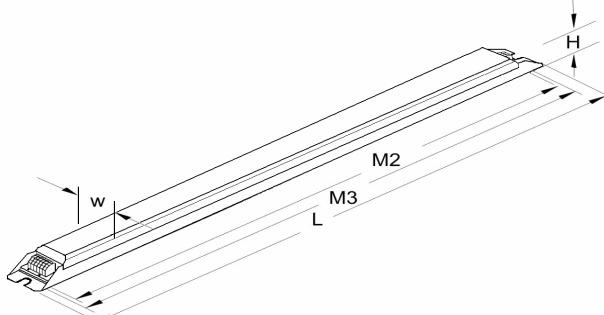	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES TOL(+/-)	N/A	16,0625 0,0125	16,375 0,0125	1,1875 0,0125	16,5 0,0125	1,125 0,0125
	MM TOL(+/-)	N/A	407,9 0,31	415,9 0,31	30,2 0,31	419,1 0,31	28,6 0,31
	LEAD LENGTH						
UNITS	BLACK	WHITE	RED	BLUE	BLUE		
INCHES TOL(+/-)	N/A	N/A	N/A	N/A	N/A		
MM TOL(+/-)	N/A	N/A	N/A	N/A	N/A		

### CARTON CHARACTERISTICS


<b>UNITS/CARTON</b> 10	<b>CARTONS/LAYER</b> 14	<b># OF LAYERS</b> 10	<b>UNITS/PALLET</b> 1400	<b>PIECE WEIGHT</b> 0,57 Kg.	<b>CARTON WEIGHT</b> 5,9 Kg.	<b>PALLET WEIGHT</b> 848 Kg.
<b>CARTONS/PALLET</b> 140	<b>CARTON DIMENSIONS</b> 44,5 x 17,3 x 7,5 cm.		<b>PALLET DIMENSIONS</b> 8,8 x 121,1 x 75,1 cm.		<b>PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET</b> 101,6 x 121,9 x 76,2 cm.	

### MISC.


#### CARTON LABEL



#### ELECTRICAL DIAGRAM

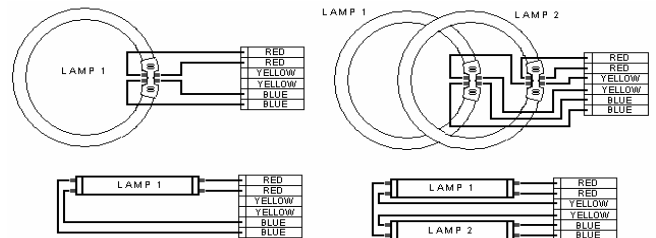

#### PRODUCT LABEL




Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.

171 Ambassador Drive  
Units 8 & 9  
Mississauga, ON  
L5T 2J1

Phone: 905-670-0746  
Fax: 905-670-9689

www.solacanada.com